

EVINRUDE®



Performance Data

Test Date: September 2016



Quintrex 570 Cruiseabout

Length	6.05m
Beam	2.30m
Dry Weight	620kg
Max Hp	150hp
Fuel Capacity	95L
Weight as Tested (approx.)	1140kg

Test Conditions

Crew	2
Air Temperature	25 C
Wind Speed	6 Knots
Fuel	95L
Water Temperature	20 C

Boat Manufactured By:

Quintrex 53 Waterway Drive, Coomera QLD 4209

www.quintrex.com.au



C150FLH

Evinrude C150FLH

Horsepower	150
Engine Type	V6 66* E-TEC D.I.
Weight (Excl. Prop)	240kg
Gear Ratio	2.17:1
Mounting Height	3rd Hole

Propeller


Series	SSP Rebel
Diameter/Pitch	15 3/4 x 18"
Part Number	0763988

Test Performance Summary

Max. Avg. Speed	TBC
Best Cruising Km/L	2.7Km/L @ 3000rpm
Range, Based on 95% Fuel capacity at Best Km/L	244 Km
Acceleration 10-50 Km/h	TBC

Performance Data

RPM	Km/h	L/h	Km/l
1000	9	2.2	4.09
2000	15	7.8	1.92
3000	37	13.7	2.70
4000	52	22.0	2.36
5000	64	34.0	1.88
6000	75	48.1	1.56

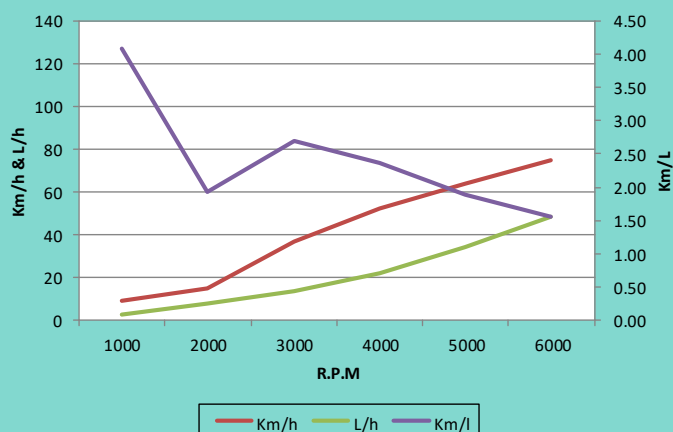

Data may vary due to changes in weather, tides, boat load, hull & propeller conditions, temperature, atmospheric pressure and wind direction.

Test Performed by Authorised Evinrude Technicians

EVINRUDE®



Performance Data

Test Date: March 2017



6.4m Alloy Home Made

Length	4.60m
Beam	N/A
Dry Weight	N/A
Max Hp	N/A
Fuel Capacity	N/A
Weight as Tested (approx.)	N/A

Test Conditions

Crew	2
Air Temperature	N/A
Wind Speed	N/A
Fuel	25L
Water Temperature	N/A

Boat Manufactured By:

Louis Densi, Homemade Aluminium Boat



C150PX

Engine

Horsepower	150
Engine Type	V6 66° E-TEC D.I.
Weight (Excl. Prop)	230kg
Gear Ratio	2.17:1
Mounting Height	4th Hole

Propeller

Series	Cyclone TBX
Diameter/Pitch	14 1/4 x 17"
Part Number	0763938


Test Performance Summary

Max. Avg. Speed	N/A
Best Cruising Km/L	1.55Km/L @ 5600rpm
Range, Based on 95% Fuel capacity at Best Km/L	37 Km
Acceleration 10-50 Km/h	35Km/h @ 4 secs

Performance Data

RPM	Km/h	L/h	Km/l
1000	7	2.0	3.50
2000	13	4.0	3.25
3000	29	12.2	2.38
4000	47	20.5	2.29
5000	60	34.0	1.76
5600 WOT	68	44.0	1.55

Data may vary due to changes in weather, tides, boat load, hull & propeller conditions, temperature, atmospheric pressure and wind direction.

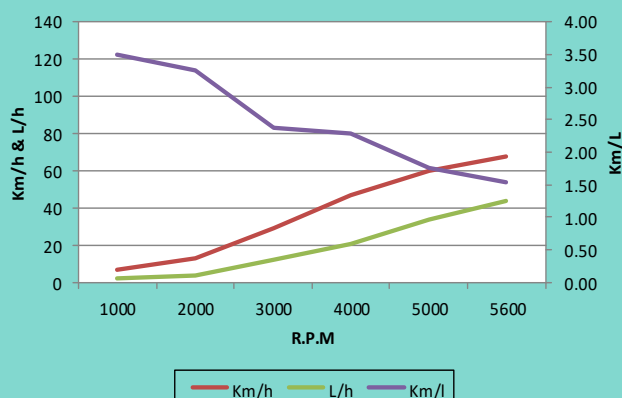

Test Performed by Authorised Evinrude Technicians

EVINRUDE®



Performance Data

Test Date: April 2017



Stacer 579 Searunner

Length	5.89m
Beam	2.35m
Dry Weight	610kg
Max Hp	150hp
Fuel Capacity	95L
Weight as Tested (approx.)	1100kg

Test Conditions

Crew	1
Air Temperature	25 C
Wind Speed	<5 Knots
Fuel	95L
Water Temperature	N/A

Boat Manufactured By:

Stacer, 53 Waterway Drive, Coomera, QLD 4209

www.stacer.com.au



C150FLH

Evinrude C150FLH

Horsepower	150
Engine Type	V6 66° E-TEC D.I.
Weight (Excl. Prop)	240kg
Gear Ratio	2.17:1
Mounting Height	4th Hole

Propeller

Series	SSP Rx4
Diameter/Pitch	15" x 18"
Part Number	0177320


Test Performance Summary

Max. Avg. Speed	82 Km/ph
Best Cruising Km/L	3.52Km/L @ 3000rpm
Range, Based on 95% Fuel capacity at Best Km/L	291 Km
Acceleration 10-50 Km/h	3 secs.

Performance Data

RPM	Km/h	L/h	Km/l
IDLE	4	0.7	5.71
1000	7	2.3	3.04
2000	12	7.0	1.71
3000	43	12.2	3.52
4000	55	19.8	2.78
5000	67	30.8	2.18
5900 WOT	82	48.0	1.71

Data may vary due to changes in weather, tides, boat load, hull & propeller conditions, temperature, atmospheric pressure and wind direction.

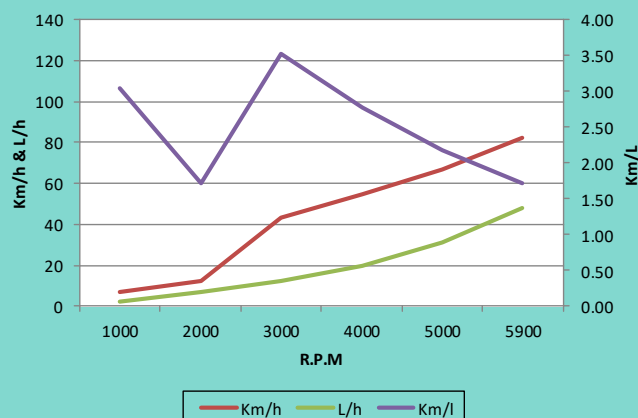

Test Performed by Authorised Evinrude Technicians